


THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF MESA MICROWAVE AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL


Coaxial Circulator 3100 to 3500 MHz 20 dB Coupling

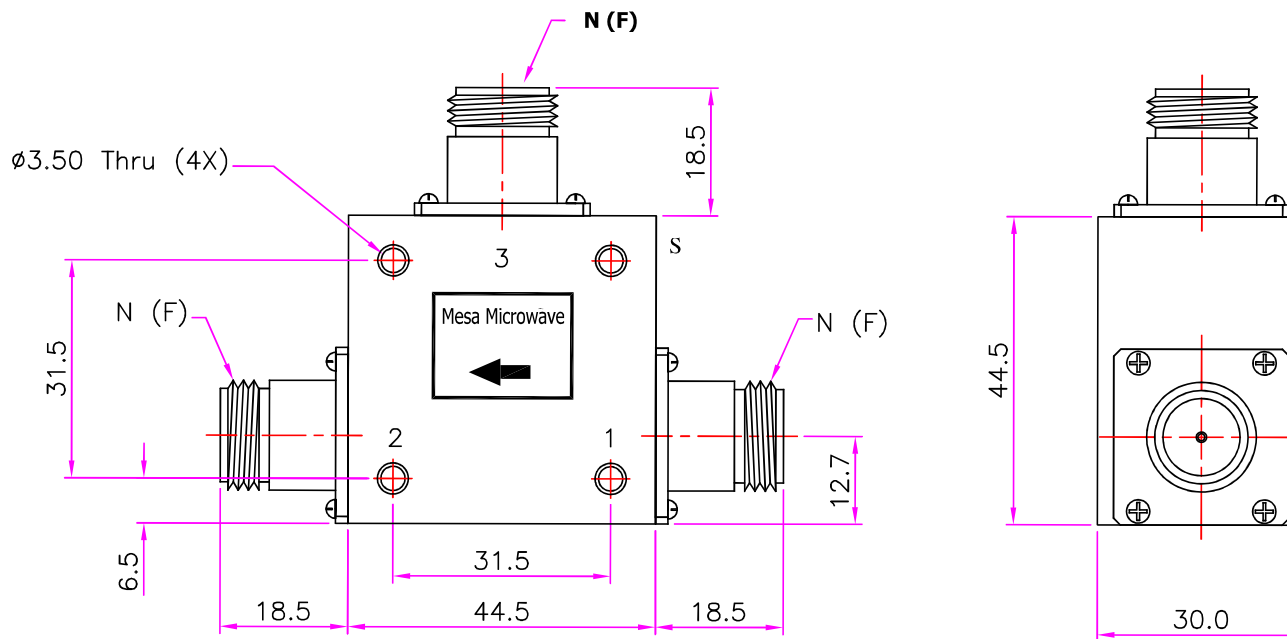

DIMENSION IN MM

SPECIFICATIONS:

FREQUENCY RANGE:	3100-3500 MHz
ISOLATION:	20 db Min
Insertion Loss:	0.30 dB Max
VSWR:	1.25:1 Max
Temperature:	-54C to +85C
Forward Power:	400 W Avg, 4 kW Peak (Duty Cycle 10%)
Reverse Power:	400 W Avg, 4 kW Peak (Duty Cycle 10%)

		2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224 T. 480.890.1612 F. 480-890-2150 sales@mesamicrowave.com www.mesamicrowave.com	
		Your Source for R/F And Microwave Components	
DESCRIPTION : <h3>Coaxial Circulator 3100-3500 Mhz, 22 dB</h3>			
MODEL NO. : <h3>MMC-CC-3135-20-N</h3>			
Drawn: Peter Adel Date: 04/21/17	SIZE A	CAGE CODE : 6LBG8	REV CODE : REV A
SCALE : N / A		ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME	SHEET 1 OF 1