


DIRECTIONAL COUPLER 18 to 40 GHz

10 dB Coupling


THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF MESA MICROWAVE AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL

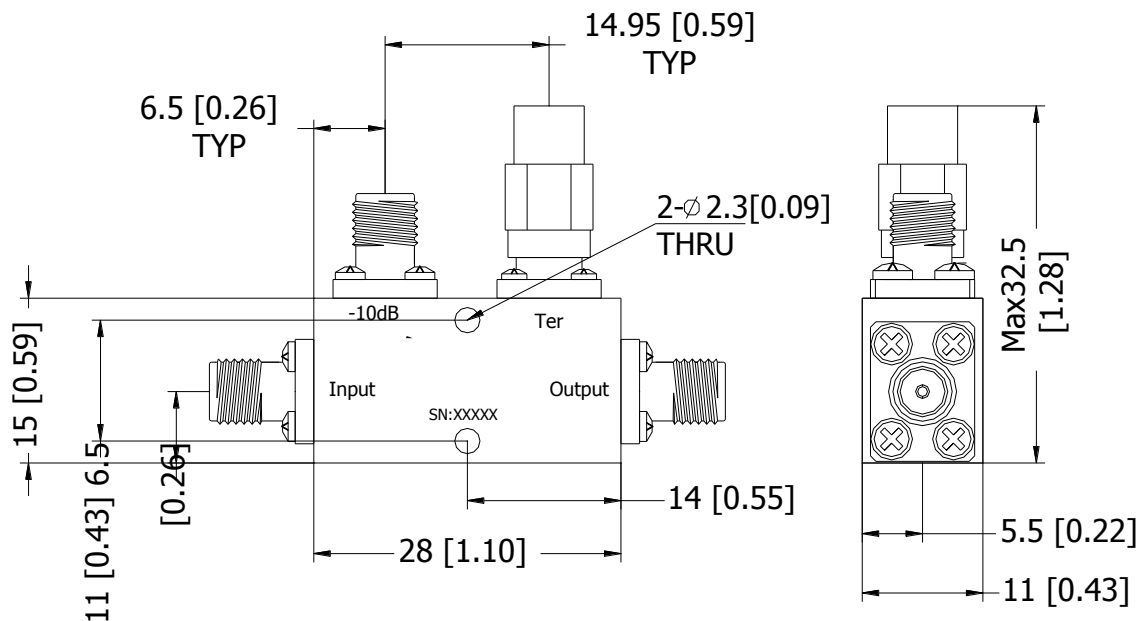

Dimensions mm[in]

SPECIFICATIONS

Frequency Range:	18 to 40 GHz
Coupling:	10 dB Min
Coupling Variation:	+/- 1 dB Max
Impedance:	50 Ohms
Directivity:	12 dB Min
Insertion Loss :	2.0 dB Max
VSWR:	1.6:1 Max
Power Average:	30 W
Connectors:	K(F) In/Output
Weight: Operating	30 Grams
Temp:	-45C to +85C

		2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224 T. 480.890.1612 F. 480-890-2150 sales@mesamicrowave.com www.mesamicrowave.com	
Your Source for R/F And Microwave Components			
DESCRIPTION		Directional Coupler 18 to 40GHz	
MODEL NO. :		MMC-DC-1840-KF-10	
SIZE	CAGE CODE :	REV CODE :	Rev A
A	6LBG8		
SCALE : N / A		ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME	
		SHEET	1 OF 1