


THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
MESA MICROWAVE AND IS NOT
TO BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL

DIRECTIONAL COUPLER, 2-4 GHZ

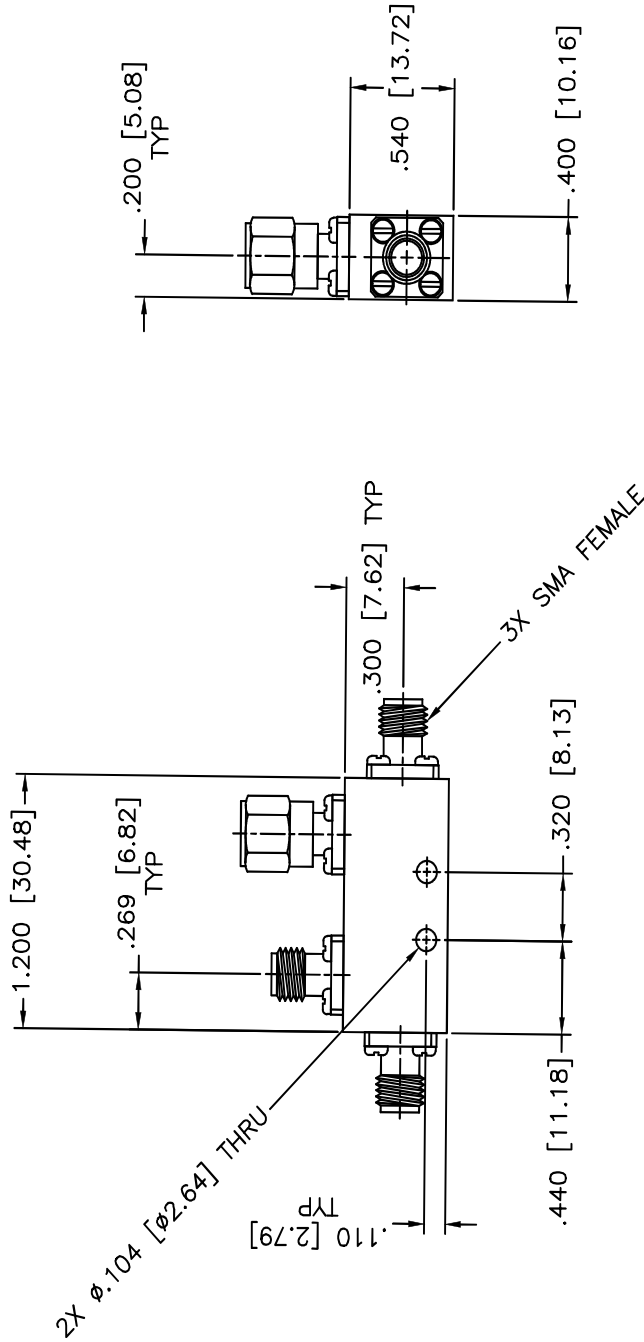

SPECIFICATIONS @ 25° C

Frequency: 2-4 GHz
Coupling: 6+/-0.7 dB
Frequency Sensitivity: +/- 0.7 dB
Insertion Loss: 0.4 dB Max
Directivity: 20 dB Min.
VSWR: 1.25:1
Power handling(Average) 50 Watt Max
Power handling (Peak) 3 KW Max
Operating Temperature: -55 to +85 ° C
Non-operating Temp: -55 to 125° C
Connectors: SMA(F)
Impedance: 50 Ohms
Shock/Vibration: MIL-STD-810F

Mesa Microwave Corporation
Your Source for R/F And Microwave Components

2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224
T. 480.890.1612 F. 480-890-2150
sales@mesamicrowave.com www.mesamicrowave.com

DESCRIPTION: **Directional Coupler 2-4 GHz**

MODEL NO.: **MMCDC0204-06**

Drawn: S.Smith
Approved: M.Nguyen

SIZE: **A**
CAGE CODE: **6LBG8**

REV CODE: **REV A**

SCALE: N/A
ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME