
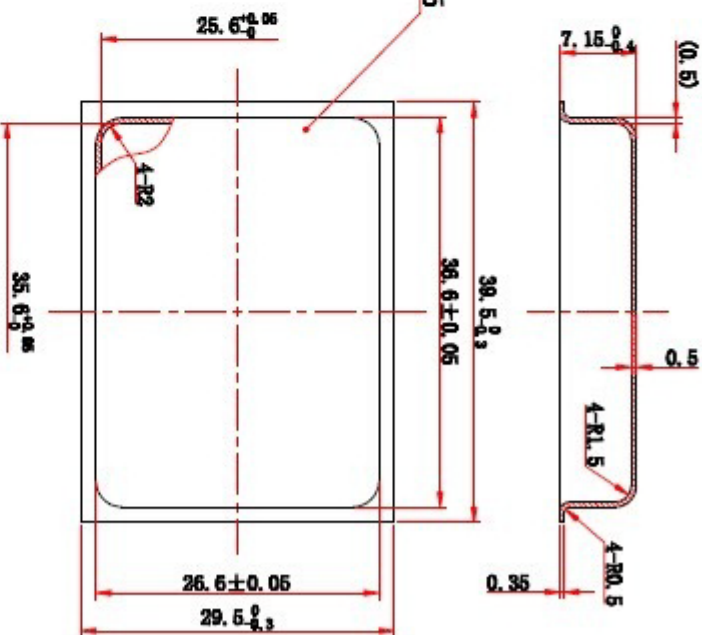
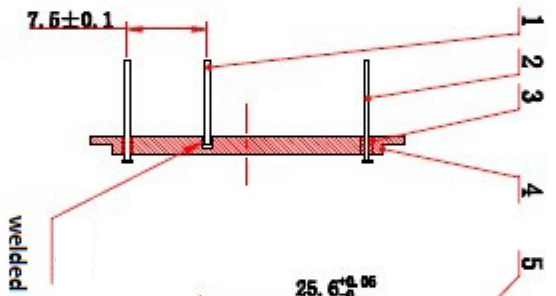


FY6. 106. 092

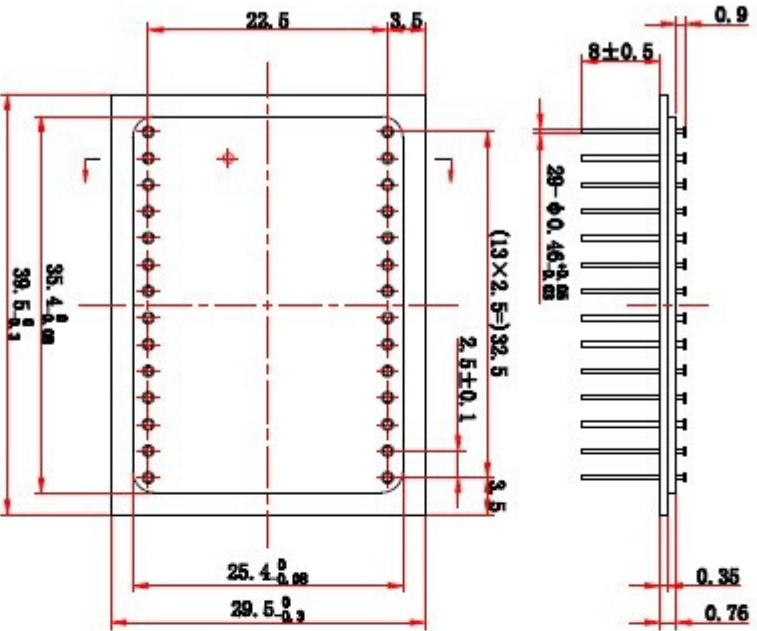

5	FTR. 011. 092	1	NI
4	FTR. 035. 092	1	4J29
3	FTR. 069. 260	28	BR-A/K
2	FTT. 744. 330	28	4J29
1	FTT. 744. 329	1	4J29

- 1 Pin and main shell with gold plating:
 2 Leak rate: 1. $D_p \leq 1 \times 10^{-9} \text{ Pa} \cdot \text{cm}^3/\text{sr}$
 3 Insulation resistance: 2. $\geq 5000 \Omega$ (500V d.c.)

The metal shell of		FY6. 106. 092	
A			2.5:1
the integrated circuit		I	I