


THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF MESA MICROWAVE AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL

Isolator 2.85-3.30 GHz



Mechanical Drawing(mm/inch)

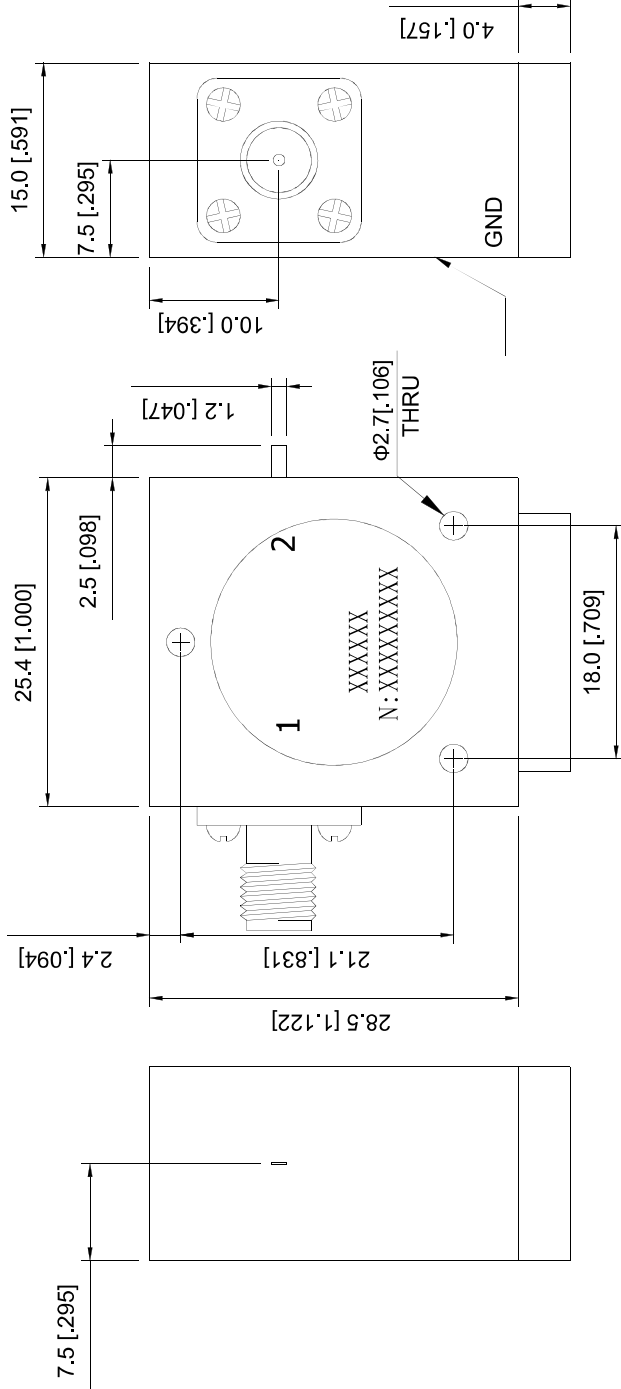

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

SPECIFICATIONS:

- Frequency Range:** 2850-3300 MHz
- Insertion Loss:** 0.30 dB Max
- Isolation:** 20 dB Min
- VSWR:** 1.25:1 Max
- Forward Power:** 100 Watts
- Reserve Power:** 20 Watts
- Operating Temp:** -40C to +85C
- Connectors:** SMA(F) Input/Drop in Output
- Impedance:** 50 Ohms
- Orientation:** Clockwise



2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224
 T. 480.890.1612 F. 480.890.2150
 sales@mesamicrowave.com www.mesamicrowave.com

DESCRIPTION : **Drop in Isolator 2850 to 3300 MHz**

MODEL NO. : **MMC-DCII-285330-20**

SIZE	CAGE CODE :	REV CODE :
A	6LBG8	
SCALE : N / A		ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
SHEET		1 OF 1