


THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
MESA MICROWAVE AND IS NOT
TO BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL

MICROSTRIP ISOLATOR 16.5-17.5 GHZ

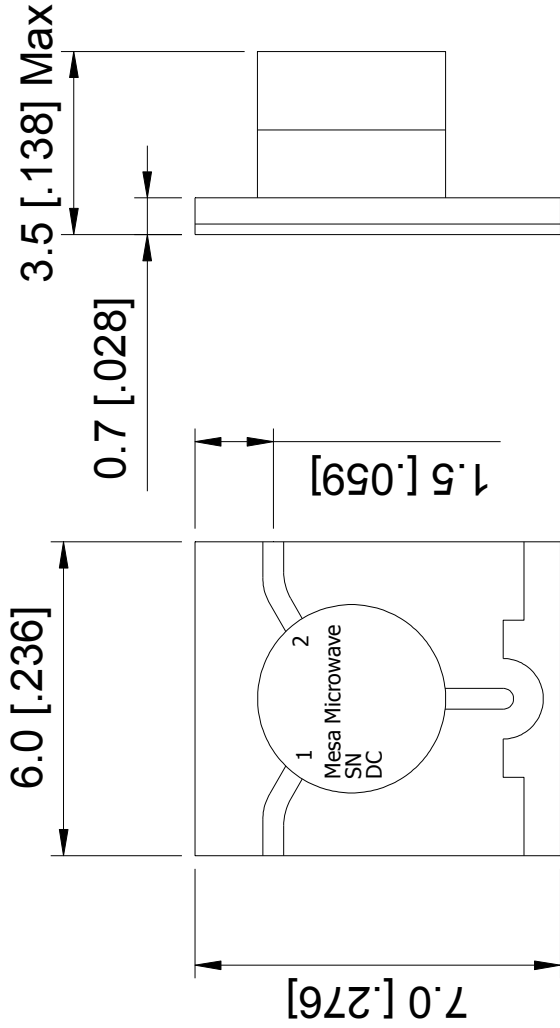

MECHANICAL DRAWING:

Unit: mm/inch, General part tolerance is ± 0.2 mm unless otherwise stated

SPECIFICATIONS

Frequency Range: 16.5-17.5 GHz
 Insertion Loss: 0.5 dB Max
 Isolation: 20 dB Min
 VSWR: 1.3:1 Max
 Forward Power: 10 Watts Max
 Reserve Power: 3 Watts Max
 Temp: -55C to +85C



2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224
 T. 480.890.1612 F. 480-890-2150
 sales@mesamicrowave.com www.mesamicrowave.com

DESCRIPTION: **MICROSTRIP ISOLATOR**

MODEL NO.: **MMC-SLI-165175-20**

		SIZE: A CAGE CODE: 6LBG8 REV CODE:	SCALE: N/A ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
	SHEET 1 OF 1		