

- DC-40GHz, up to 50kW
- High Reliability, Repeatable Performance
- Anti-pulse and Anti-burnout
- Low IM3 Versions Available
- Military & Space
- Radar&Electronic warfare
- Test Equipment



DC-40GHz 2W COAXIAL FIXED TERMINATION


ELECTRICAL SPECIFICATIONS@25°C:

Part Number	Frequency Range(GHz)	Max VSWR
MMCT0802M	DC-8	1.10
MMCT12402M	DC-12.4	1.10
MMCT1802M	DC-18	1.15
MMCT265M	DC-26.5	1.20
MMCT4002M	DC-40	1.25

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	Φ9*18.4		millimeter
Weight	5	type	gram
Operating Temperature	-55~+125		°C
Impedance	50		ohms

OUTLINE DRAWING(mm):

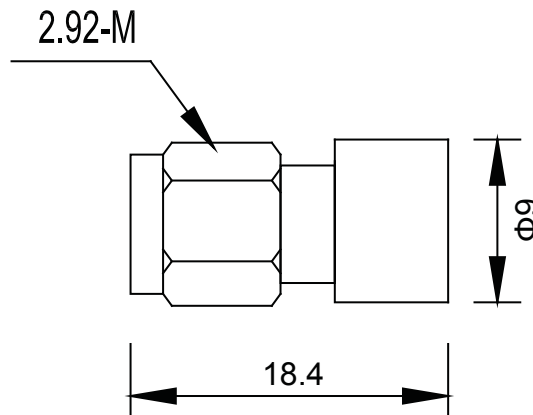

Note:

- 1.Average power: 2W @ 25°C , 0.2W @ 125°C.
- 2.Peak power:100W (5μs pulse width with 2% duty cycle)
- 3.Connector type:2.92mm male or female, please remark connector type when order.
- 4.Customized specification is also available.