



USE AS A DROP-IN

#0-80 UNF THRU

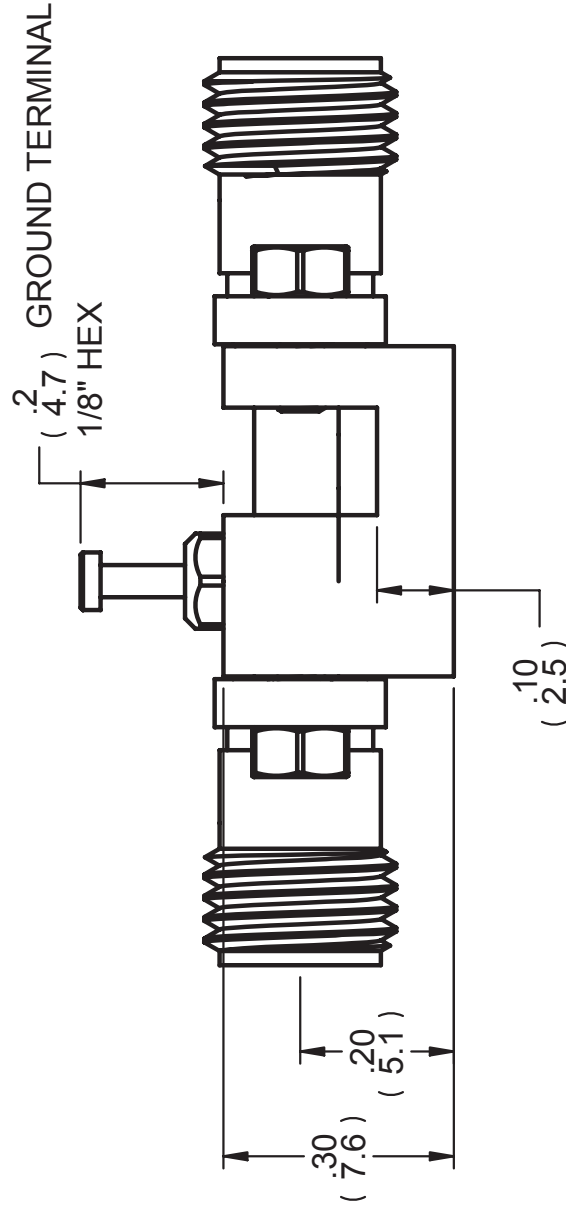

Frequency	100 MHz to 18 GHz
Noise Figure	2.0 dB Max
P1 dB	8 dBm Min
Gain	30 dB Min
Gain Variation	+/- 1.5 dB
VSWR(In/Output)	2.5:1
Current	135 mA
Voltage	12-15V
Operating Temp	-40 C to +60C
Non Operating Temp.	-55C to +125C
Connectors (In/Output)	SMA (F)
Impedance	50 Ohms
Max Input Power	20 dBm

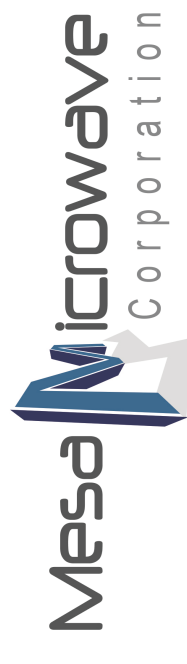

Your Source for R/F And Microwave Components

NAME		DATE
DRAWN	EG	4/10/2012
CHECKED	RM	4/10/2012
ENG APPR	LC	5/10/2012
MGR APPR		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES ANGLES ±0.05°		
2 PL ±0.01 3 PL ±0.005		
SIZE	DWG NO	REV
B		B
SCALE:	WEIGHT:	SHEET 1 OF 1

MMCLNA0118-3025

sales@mesamicrowave.com

www.mesamicrowave.com

2460 W. Ray Rd., Ste. 2, Chandler, AZ, 85224

T:480-890-1612 F:480-890-2150