



MILLIMETER WAVE SOLID STATE HIGH POWER AMPLIFIER

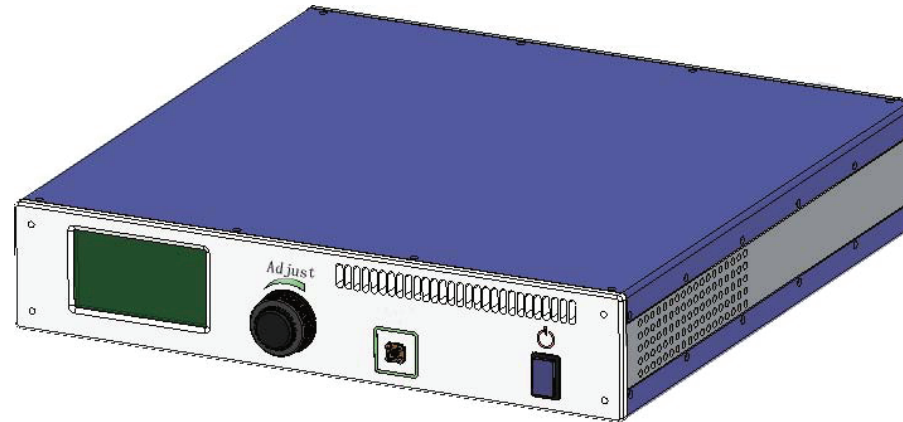

SPECIFICATIONS

Frequency: 26-40 GHz
 Small Signal Gain: 40 dBm
 Output Power: 37 dBm
 VSWR: 2:1
 Input Voltage: 220V
 Max Input Power: +20 dBm
 Connectors (in/Output): WR28
 Weight: 25 Kilograms
 Operating Temp: -20C to +60C
 Non-Operating Temp: -40C to -85C

		2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224 T. 480.890.1612 F. 480-890-2150 sales@mesamicrowave.com www.mesamicrowave.com	
Your Source for R/F And Microwave Components			
DESCRIPTION :		HIGH POWER AMPLIFIER	
MODEL NO. :		MMCPA2640-4046	
SIZE	CAGE CODE :	REV CODE :	
A	6LBG8		
SCALE : N / A		ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME	SHEET 1 OF 1