


THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
MESA MICROWAVE AND IS NOT TO BE  
USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.


# TWO-WAY POWER DIVIDER 7.95-8.55 GHz

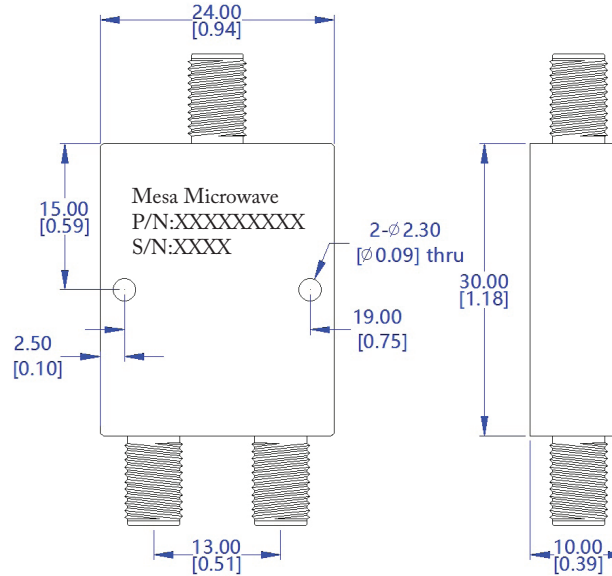

Unit : MM / [Inch] , Unless otherwise specified, Outline drawing  $\pm 0.2\text{MM}$  ; Hole  $\pm 0.1\text{MM}$

## SPECIFICATIONS@ 25° C

Frequency Range:	7.95-8.55 GHz
Impedance:	50 OHMS
Input VSWR:	1.3 Max.
Output VSWR:	1.3 Max.
Insertion Loss:	0.8 dB Max.
Amplitude Balance:	$\pm 0.4$ dB Max.
Phase Balance:	$\pm 5$ deg Max.
Isolator:	20 dB Min.
CW Power:	10 W Max.
Peak Power:	1 KW Max.
Operating Temperature:	-40 to +70°C
Input Connectors:	SMA-F
Output Connectors:	SMA-F
Dimensions:	24x30x10 mm
Surface:	Paint Black

		2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224 T. 480.890.1612 F. 480-890-2150 sales@mesamicrowave.com www.mesamicrowave.com	
Your Source for R/F And Microwave Components			
DESCRIPTION : <b>TWO-WAY POWER DIVIDER 7.95-8.55 GHz</b>			
MODEL NO. : <b>MMCPD795855-2S</b>			
SIZE	CAGE CODE :	REV CODE :	
A	6LBG8		
SCALE : N / A		ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME	SHEET 1 OF 1