


# Coaxial Fixed Attenuator DC to 6 GHz

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF MESA MICROWAVE AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL


5 Watts, Type SMA Connectors  
**OUTLINE DRAWING(mm):**

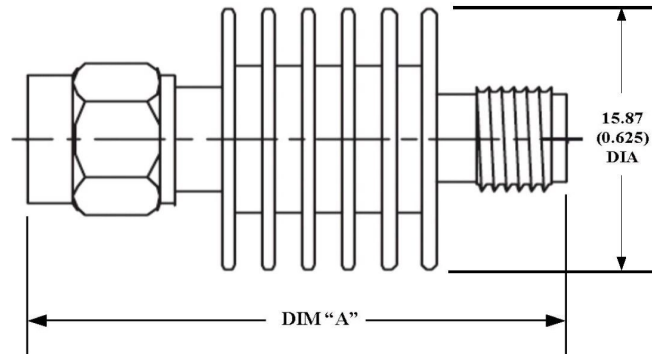

## ELECTRICAL SPECIFICATIONS

Frequency Range:	DC to 6 GHz
Impedance:	50 Ohms
Values:	1 to 60 dB
Accuracy :	1-2 +/- 0.5 dB 3-9 +/- 0.3 dB 10-20 +/- 0.20 dB 21-40 +/- 1.0 dB 50 +/- 1.5 dB
Max VSWR:	1.20 Max
Power Rating:	5W @ 25C, de-rated linearly to 0.5W @125C 1KW Peak (5 usec pulse width, 0.05% duty cycle)
Temperature:	-55C to +125C
Connectors:	SMA as per MIL-39012 passivated Stainless Steel



 Your Source for R/F And Microwave Components		2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224 T. 480.890.1612 F. 480-890-2150 sales@mesamicrowave.com www.mesamicrowave.com	
DESCRIPTION : <b>Coaxial Attenuator Dc to 6 GHz, 5 Watts</b>			
MODEL NO. : <b>MMC-CA-DC6-5-S-XX</b>			
SIZE	CAGE CODE :	REV CODE :	
A	6LBG8		
SCALE : N / A	ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME		SHEET 1 OF 1