


# Coaxial Isolator 10 to 15 GHz

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF MESA MICROWAVE AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL

## OUTLINE DRAWING(mm):

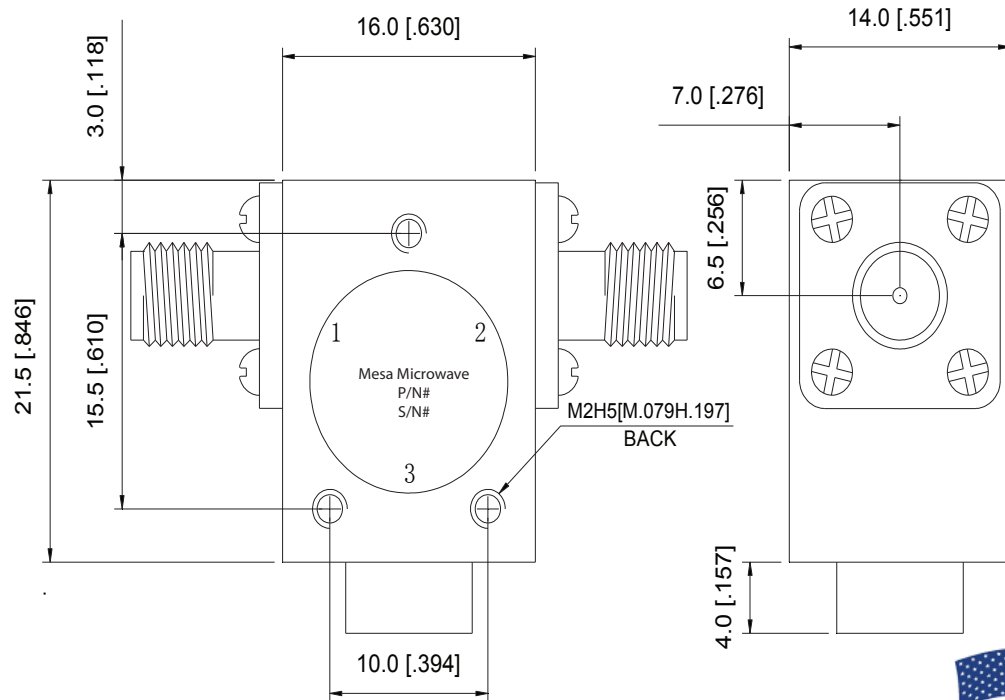

## ELECTRICAL SPECIFICATIONS

Frequency:	10,000 to 15,000 MHz
Isolation:	20 dB Min
Insertion Loss:	0.8 dB Max
VSWR :	1.45:1
Forward Power (W):	60
Reverse Power (W):	10
Power Average:	10 Watts
Connectors:	SMA(F) Passivated Stainless Steel In/Output
Contact Pins	Beryllium Copper Gold Plated
Impedance:	50 Ohms
Operating Temp:	-30C to +75C



		2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224 T. 480.890.1612 F. 480-890-2150 sales@mesamicrowave.com www.mesamicrowave.com	
Your Source for R/F And Microwave Components			
DESCRIPTION :		<b>Coaxial Isolator 10 to 15 GHz</b>	
MODEL NO. :		<b>MMC-CI-1015-20</b>	
SIZE	CAGE CODE :	REV CODE :	
A	6LBG8		
SCALE : N / A		ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME	SHEET 1 OF 1