


THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
MESA MICROWAVE AND IS NOT
TO BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL




COAXIAL ISOLATOR

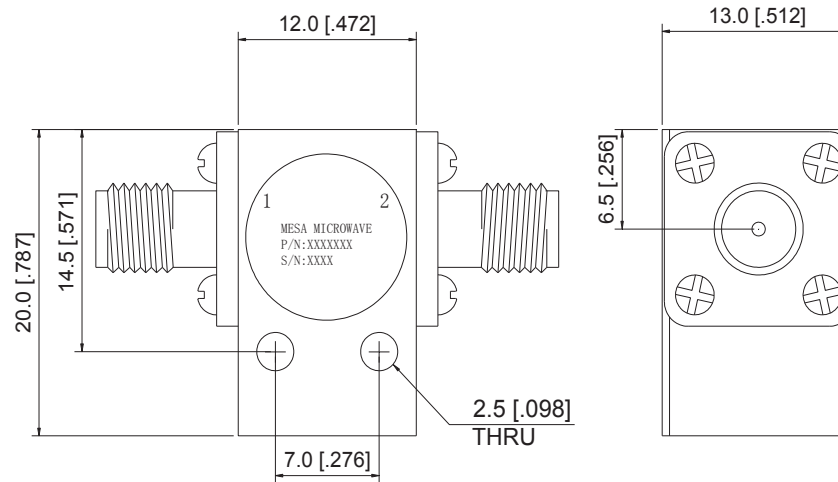

Unit: mm/ inch, General part tolerance is 0.2mm unless otherwise stated.

SPECIFICATIONS @ 25° C

Frequency Range:	16.0-18.0 GHz
Insertion Loss:	0.5 dB Max
Isolation:	20dB Min
VSWR:	1.20 Max
Foward Power:	2 WReverse
Power:	2 W
Temp.:	-55 to +85 ° C
Connector Type:	SMA-F

		2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224 T. 480.890.1612 F. 480-890-2150 sales@mesamicrowave.com www.mesamicrowave.com	
Your Source for R/F And Microwave Components			
DESCRIPTION :		Coaxial Isolator	
MODEL NO. :		MMC-CI-1618-20	
		SIZE A	REV CODE : rev A
		CAGE CODE : 6LBG8	SCALE : N / A
		ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME	SHEET 1 OF 1