


THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF MESA MICROWAVE AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL

DIRECTIONAL COUPLER 2.0-18.0 GHZ 10 dB

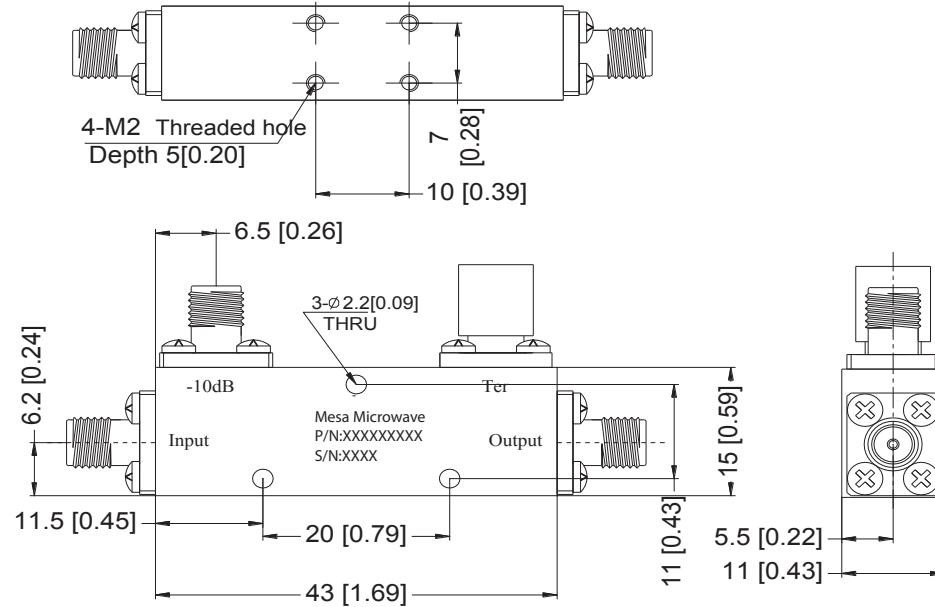

SPECIFICATIONS

Frequency:	2.0-18.0 GHz
Nominal Coupling:	10 dB Typ.
Freq. Sensitivity:	-/+ 0.7 dB
Directivity:	15 dB Min.
Insertion Loss:	1.1 dB Max.
VSWR Primary:	1.5:1
VSWR Secondary:	1.5:1
Power Rating Average:	50 Watts
Power Rating Peak:	1 KW
Impedance:	50 Ohms
Operational Temp.:	-45°C to +85°C
Storage Temp.:	-55° C to +125°C
Connector Input/Output:	SMA-Female

OUTLINE DRAWING(mm):

		2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224 T. 480.890.1612 F. 480-890-2150 sales@mesamicrowave.com www.mesamicrowave.com	
Your Source for R/F And Microwave Components			
DESCRIPTION : Directional Coupler 2.0-18.0 GHz 10 dB			
MODEL NO. : MMC-DC-20180-10			
	SIZE A	CAGE CODE : 6LBG8	REV CODE : A
	SCALE : N / A		ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
			SHEET 1 OF 1