


THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF MESA MICROWAVE AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL

Schedule B: 8529.10.9000 EAR 99 NLR

## 8.20-12.40 GHz Standard Gain Horn Antenna

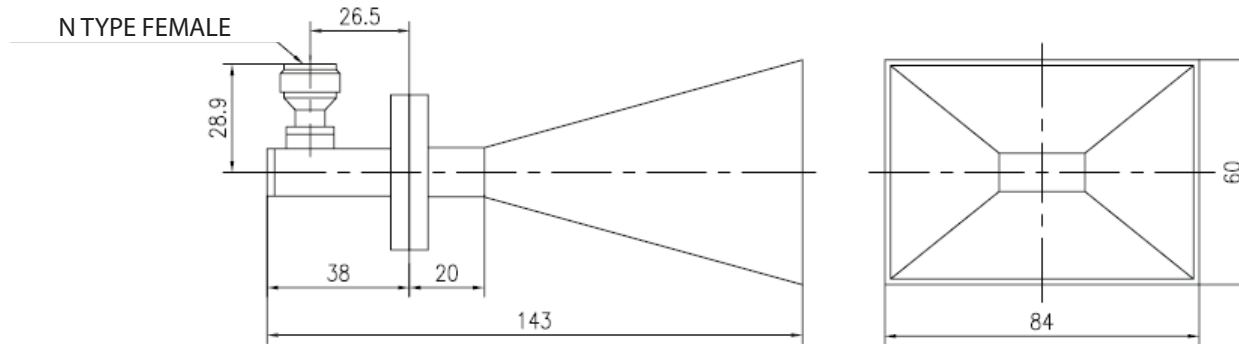

### SPECIFICATIONS

Frequency Range(GHz)	8.20-12.40
Gain(dB)	15 Typ.
3dB Beamwidth(deg)	30 Typ.
Waveguide	WR90
Material	Al
Output	N-F
Net Weight(Kg)	.15 Around
Size(mm) W x H x L	84X60X143

**Mesa Microwave**  
Corporation

2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224  
T. 480.890.1612 F. 480-890-2150

Your Source for R/F And Microwave Components

sales@mesamicrowave.com www.mesamicrowave.com

DESCRIPTION :

**8.20-12.40 GHz Standard Gain Horn Antenna**

MODEL NO. :

**MMC-WGHA-WR90-15-N(F)**

SIZE  
A

CAGE CODE :  
6LBG8

REV CODE :

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO  
CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1