


THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF MESA MICROWAVE AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL

Power Divider 8 Way, 0.5 to 18 GHz

OUTLINE DRAWING mm(Inch):

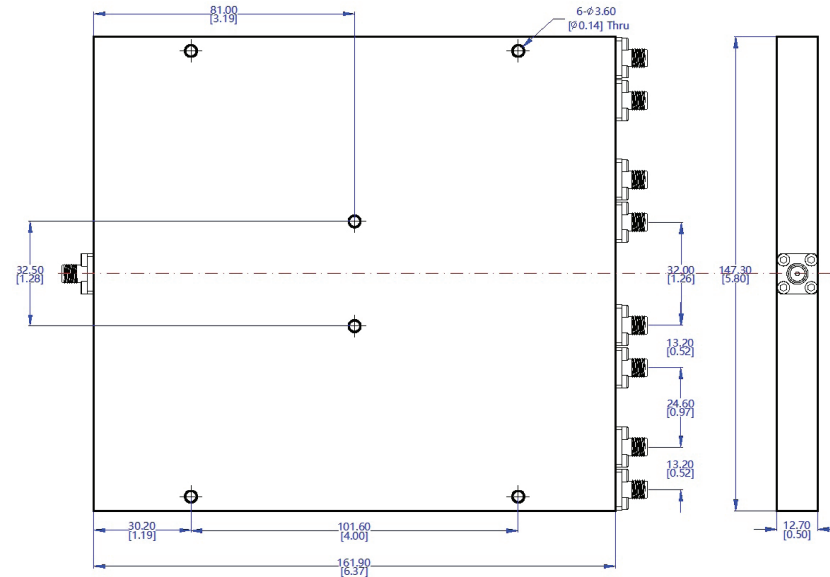

ELECTRICAL SPECIFICATIONS

Frequency:	500 to 18,000 MHz
Isolation:	0.5 to 1 GHz: 15 dB 1 to 18 GHz: 18 dB
Insertion Loss:	7.0 dB Max
VSWR (In/Output):	1.5:1 Max
Phase Balance:	+/-5 Degree Max
Amplitude Balance:	+/-0.4 dB Max
Power Average:	20 Watts
Peak Power:	3 KW
Connectors:	SMA(F) In/Output
Impedance:	50 Ohms
Operating Temp:	-55C to +105C



Mesa Microwave Corporation

2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224
T. 480.890.1612 F. 480-890-2150

Your Source for R/F And Microwave Components

sales@mesamicrowave.com www.mesamicrowave.com

DESCRIPTION :

Power Divider 8 Way, 0.5 to 18 GHz

MODEL NO. :

MMCPD-0518-18-8

SIZE
A

CAGE CODE :
6LBG8

REV CODE :

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1