


THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF MESA MICROWAVE AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL

COAXIAL FIXED TERMINATION DC-6.0 GHz, 10 Watts

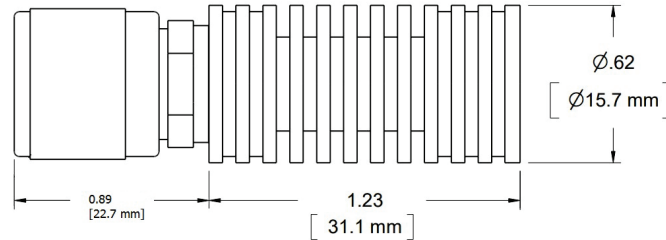


Dimensions IN[mm]

ROHS Compliant

Designed to meet MIL-STD-3933

SPECIFICATIONS

Frequency: DC to 6 GHz
 Average Power: 10W @ 25C, derated linearly to 0.5W @125C. Peak Power: 1.0KW (5 μ s pulse width with 0.2% duty cycle)
 Impedance: 50 Ohms
 VSWR: 1.15:1 Max
 Connectors: N(M or F) Stainless Steel
 -1 N(M)
 -2 N(F)
 Housing: Black Aluminum Alloy Body
 Temp Range: -55C to +125C

		2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224 T. 480.890.1612 F. 480-890-2150 sales@mesamicrowave.com www.mesamicrowave.com	
Your Source for R/F And Microwave Components			
DESCRIPTION : Coaxial Termination DC to 6 GHz, 10 Watts			
MODEL NO. : MMC-CT-DC06-10W-N-1			
SIZE A	CAGE CODE : 6LBG8	REV CODE : REV A	
SCALE : N / A	ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME		SHEET 1 OF 1