


THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF MESA MICROWAVE AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL

DIRECTIONAL COUPLER, 2-8 GHz, 20 dB

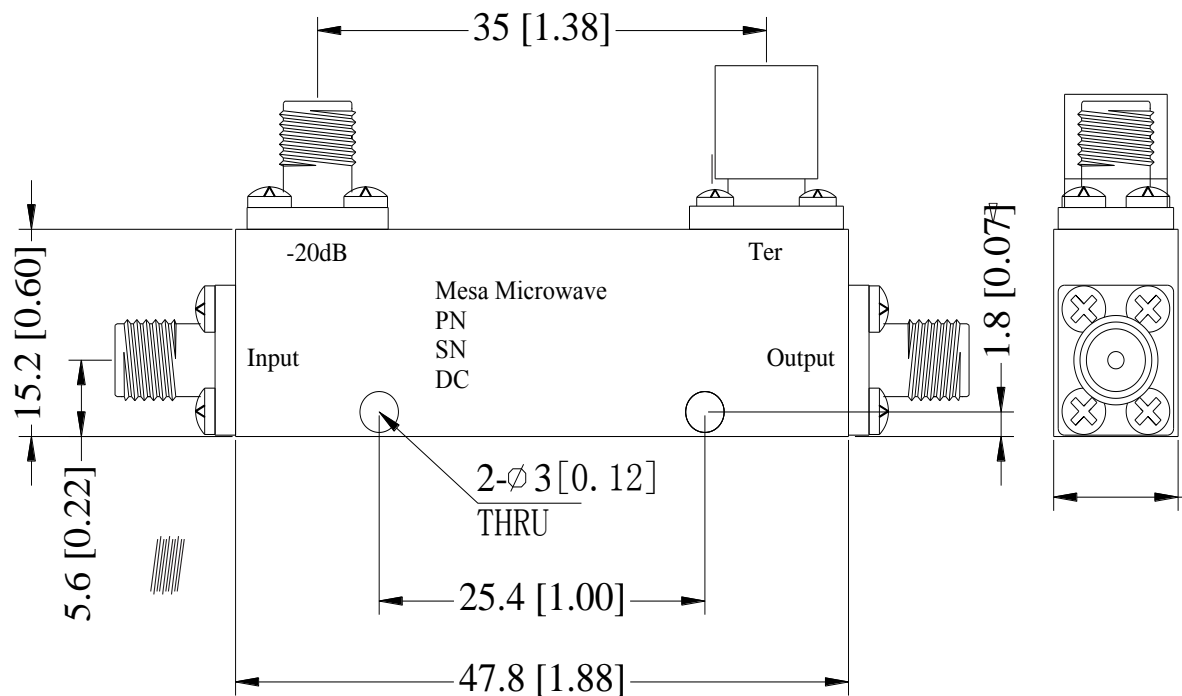

SPECIFICATIONS:

Frequency Range: 2-8 GHz
 Coupling: 20 dB +/- 1 dB
 Frequency Sensitivity: +/- 0.5 dB
 Insertion Loss: 0.4 dB Max
 Directivity: 20 dB Min
 VSWR: 1.20:1 Max
 Power Handling (Avg): 50 W Max
 Power Handling (Peak): 1KW Max
 Operating Temp: -45C to +85C
 Storage Temp: -55C to +105C
 Weight: 50 Grams
 RF Connectors (In/Output): SMA(F)
 Impedance: 50 Ohms

Dimensions mm[In]

		2460 W. Ray Rd., Ste. 2 Chandler, AZ 85224	
		T. 480.890.1612 F. 480-890-2150	
Your Source for R/F And Microwave Components		sales@mesamicrowave.com www.mesamicrowave.com	
DESCRIPTION :			
Directional Coupler 2-8 GHz			
MODEL NO. :			
MMCDC0208-20			
Drawing Number: 8AD511	SIZE A	CAGE CODE: 6LBG8	REV CODE: REV A
	SCALE: N/A	ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME	
			SHEET 1 OF 1